


Water Filtration

- Water filtration is critical to the performance of your oven. Users must establish a regular filter replacement schedule. Required frequency will depend on your water quality and type of filtration system
- Filter change frequencies below are indicative minimums. If your water quality is poor, you may need to replace the filter more frequently
- Indicators that your filter may require changing are:
 - Surface corrosion present in the oven cavity. Contact Stoddart for advice at 1300 307 289
 - Scale building up more frequently than normal
 - Oven starving for water creating error messages


BWT Filter Cartridge

- Filter to be changed a minimum of every 6 months, or more frequently in areas with poor water quality
1. Turn off water supply at the isolation tap
 2. Remove the old filter cartridge (unscrew clockwise)
 3. Before installing the replacement filter cartridge, mark the installation date and the replacement date (no later than 6 months) on the filter's rating plate. Diarise the replacement date as a reminder
 4. Install new filter cartridge (screw in anti-clockwise). To order new cartridge contact spares@stoddart.com.au or call 1300 307 289
 5. Turn on the water supply
 6. Flush/bleed the new cartridge by pressing the "Bleed Button" for a minimum of 60 seconds (located on the top of the filter head)

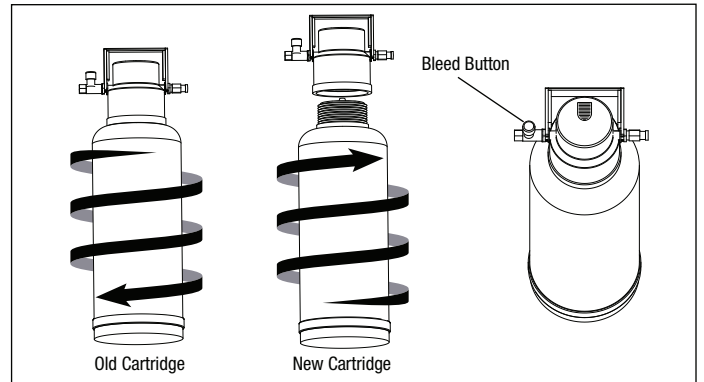

Reverse Osmosis Filter Cartridges

- A reverse osmosis filter is required in areas where the water has high chlorides or other corrosive minerals present. Where appropriate, this system should have been recommended by your supplier at the time of your oven purchase
 - Filters 1 and 2 to be changed a minimum of every 6 months, or more frequently in areas with poor water quality
 - Filter 3 to be changed a minimum of every 12 months, or more frequently in areas with poor water quality
1. Turn off water supply at the isolation tap
 2. Remove the old filter cartridge (unscrew clockwise) until it stops. Pull the cartridge down to remove the cartridge
 3. Repeat steps 2 on the remaining cartridges
 4. All cartridges are labelled with a number on the top left hand corner. Use the correct numbered cartridge for the replacement. To order replacement cartridge contact spares@stoddart.com.au or call 1300 307 289
 5. Before installing the replacement filter cartridge, mark the installation date and the replacement date (no later than 6 months for filter 1 and 2, no later than 12 months for filter 3) on the filter's rating plate. Diarise the replacement date as a reminder
 6. Insert and turn anti-clockwise until the cartridge stops
 7. Once all cartridge have been replaced turn on the water supply
- Indicative minimum replacement frequency:

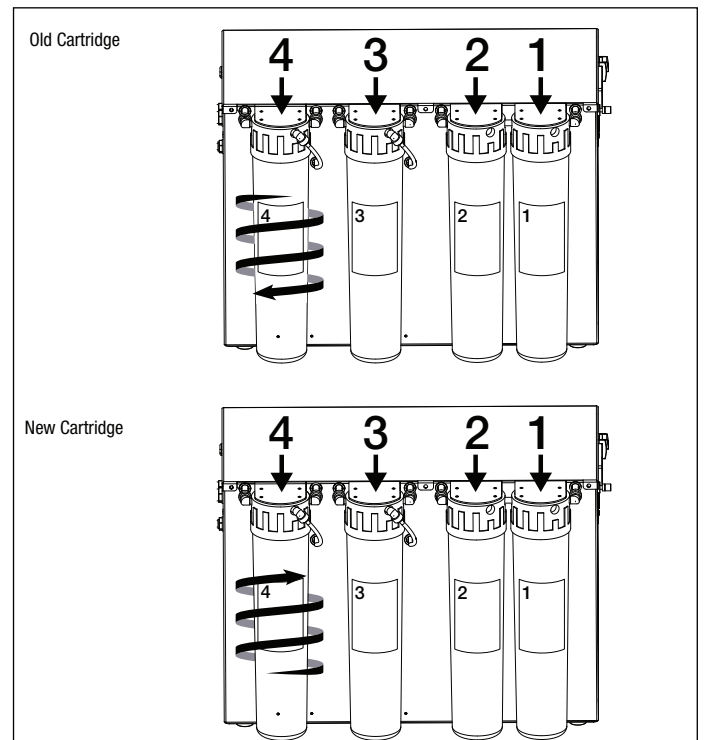

| Part Number | Description | Recommended Service Interval (depending on the usage and water quality) |
|-----------------------|---|---|
| 1. SPAR.XSE.AX10-CCF | Sediment and Dirt Particles Removal Cartridge | 3 – 6 months |
| 2. SPAR.XSE. AX10-GAC | Chlorine, Taste/Odour Reduction Cartridge | 3 – 6 months |
| 3. SPAR.XSE. AX10-ROM | Reverse Osmosis Membrane | 12 – 24 months |
| 4. SPAR.XSE. AX10-WS | Water Stabiliser | 3 – 6 months or when TDS is less than 60 PPM |